
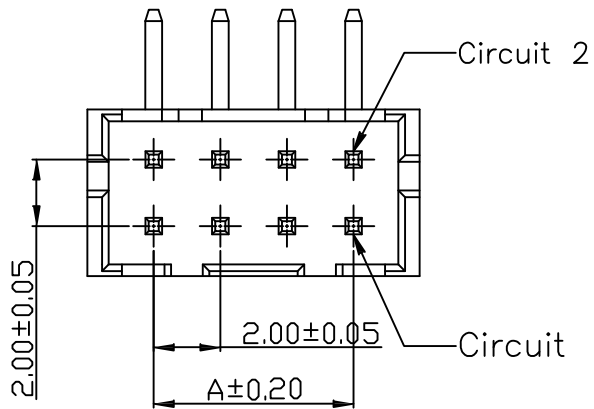








1



- SPECIFICATION**
- Voltage rating: 250V AC, DC
  - Current Rating: 3A, AC, DC
  - Withstand voltage: 1000V AC/minute
  - Contact resistance: 20mΩ max
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C ~ +85° C

- WAFER**
- Material: Base: Nylon 66/Nylon 46 UL94V-0  
pin: Brass Tin-plated

2

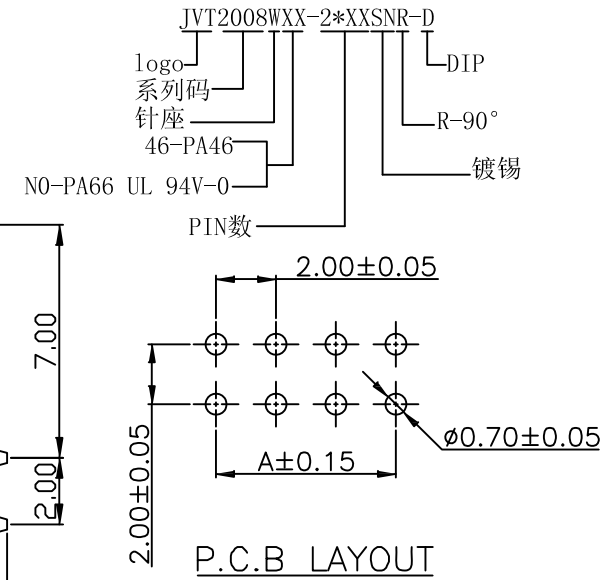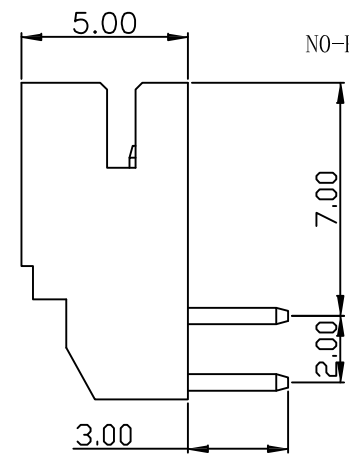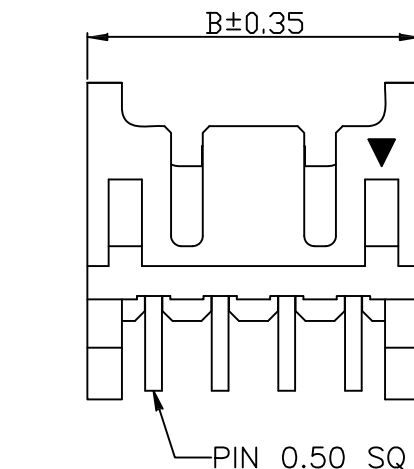

3

2X02P

2X03P

2X04~2X25P

PIN	DIM. (mm)		PIN	DIM. (mm)	
	A	B		A	B
2X02	2.00	6.00	2X14	26.00	30.00
2X03	4.00	8.00	2X15	28.00	32.00
2X04	6.00	10.00	2X16	30.00	34.00
2X05	8.00	12.00	2X17	32.00	36.00
2X06	10.00	14.00	2X18	34.00	38.00
2X07	12.00	16.00	2X19	36.00	40.00
2X08	14.00	18.00	2X20	38.00	42.00
2X09	16.00	20.00	2X21	40.00	44.00
2X10	18.00	22.00	2X22	42.00	46.00
2X11	20.00	24.00	2X23	44.00	48.00
2X12	22.00	26.00	2X24	46.00	50.00
2X13	24.00	28.00	2X25	48.00	52.00

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

4

**JVT 乔业连接器**  
CONNECTORS

版本: \_\_\_\_\_ 变更内容: \_\_\_\_\_ 日期: \_\_\_\_\_

单位: mm 比例: 1:1 日期: 20140428

核准	审核	绘图	品名	PHD2.0 90° WAFER		
	陈宁亮	李勇军	料号	JVT2008WXX-2*XXSNR-D		
			图名	050	版本	A